

Collection Overview

Interior Installations

Raw steel column with primed steel treads and platform, available with vinyl or aluminum handrails and suitable for corner or loft installations. Optional components include Red Oak wood tread covers, Anti-slip traction tread covers and additional platform rail. Adjustable rise from 8 ½" to 9 ½" between treads.

Exterior Installations

Galvanized steel column, treads and platform, available with vinyl or aluminum handrails and suitable for exterior and interior corner or loft installations. Optional components include additional platform rail. Adjustable rise from 8 ½" to 9 ½" between treads.

Mylene Stairs stands behind our product with a five-year Warranty on everything we sell and a lifetime warranty on metal fabrication (see below for details). You can trust us if you have a problem, we will fix it for you, that's the bottom line. If you have any questions please e-mail us at info@mylenstairs.com or call us at (855) 821-1689. More detailed warranty information is available on our Warranty Disclaimer document or on our www.mylenestairs.com web site.

Color and Finish Options



	Interior	Exterior
Column	Raw Steel	Galvanized Steel
Treads and Balusters	Primed (Flat Black)	Galvanized Steel
Tread Type	Smooth Steel	Diamond Plate
Handrail	Black Vinyl or Raw Aluminum	Black Vinyl or Raw Aluminum
Optional Wood Tread Covers	Red Oak	N/A
Optional Traction Tread Covers	Black	N/A

Diameter Measurements

The recommended opening should be at least 2" wider than the staircase's diameter.

Please refer to the following chart for more diameter measurement information.

Stair Diameter	Floor Opening
42" (3'6")	44"
60" (5'0")	62"

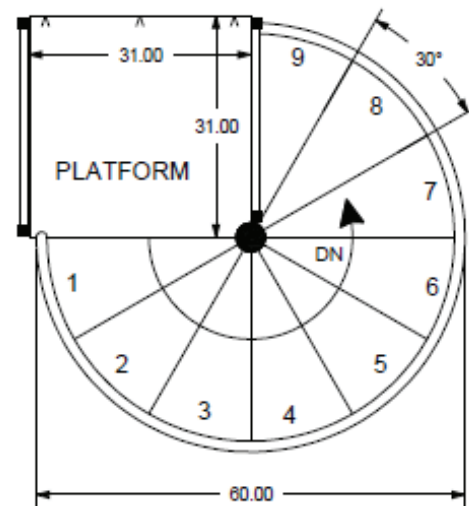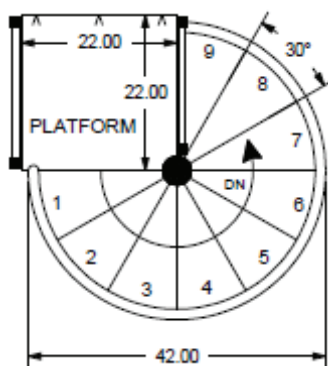


Please call (888) 243-3339 or visit stairwayshop.com/page/contact/ for additional information, assistance, or questions.

Walking Path Measurements

The clear walking path is the measurement from the inside of the column to the inside of the handrail and will vary by model and diameter choice.

Please refer to the following chart for more walking path measurement information.

Stair Diameter	Clear Walking Path
42" (3'6")	17"
60" (5'0")	26"

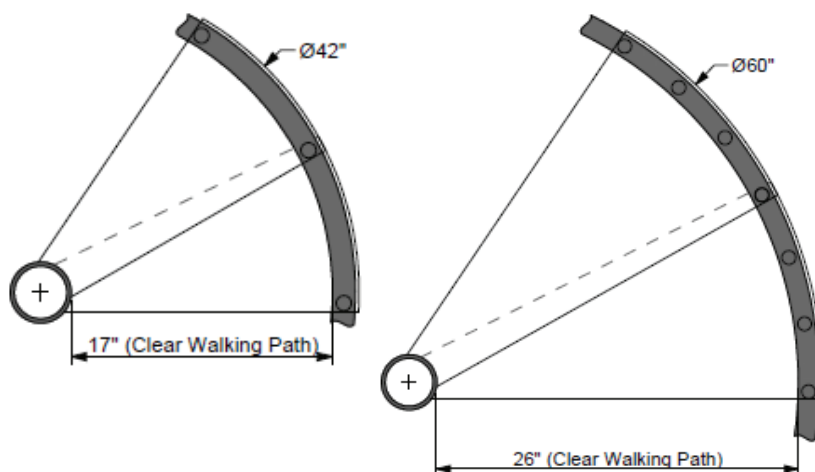


Height Measurements

The Reroute Collection is offered in various tread counts to cover a multitude of height application. Each tread is adjustable from 8 1/2" to 9 1/2" between treads. Floor to Floor height is measured from the lower floor to the top of the floor above. Please refer to the chart below to find the proper tread count for your installation application.

Tread Count	Floor to Floor Measurements	
	Height Min	Height Max
9	85"	95"
10	93.5"	104.5"
11	102"	114"
12	110.5"	123.5"
13	119"	133"
14	127.5"	142.5"
15	136"	152"

Elevation Measurements (continued)

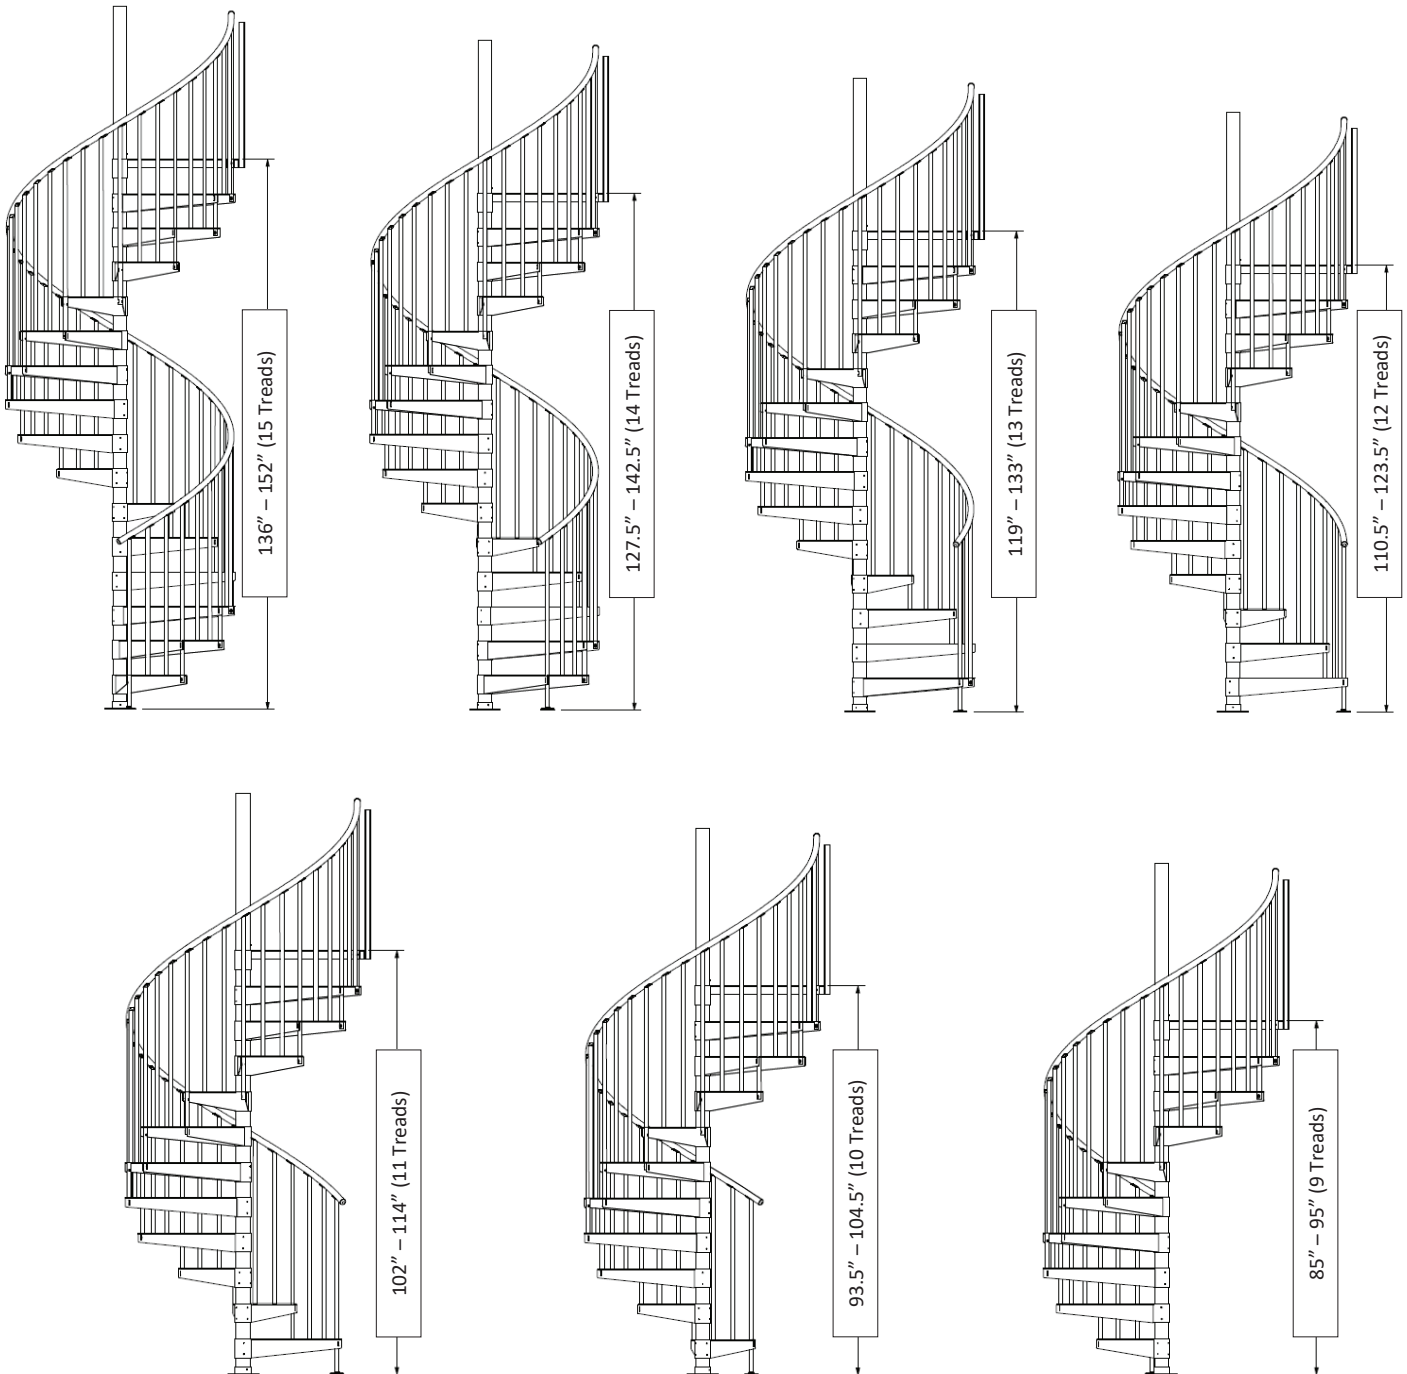

Please call (888) 243-3339 or visit stairwayshop.com/page/contact/ for additional information, assistance, or questions.