


Montauk Exterior

valid from

01/19/24

	diameter		
	47"	55"	63"
outside radius	23-5/8"	27-9/16"	31-1/2"
max. floor to floor height	120-1/4" (10'-1/4")	120-1/4" (10'-1/4")	120-1/4" (10'-1/4")
max. floor to floor height with 1 height extension	129-1/2" (10'-9-1/2")	129-1/2" (10'-9-1/2")	129-1/2" (10'-9-1/2")
max. floor to floor height with 2 height extensions	138-3/4" (11'-6-3/4")	138-3/4" (11'-6-3/4")	138-3/4" (11'-6-3/4")
tread depth	7-3/4"	8-3/8"	8-3/4"
rise	7-1/2" - 9-1/4"	7-1/2" - 9-1/4"	7-1/2" - 9-1/4"
free passage width	19'1/8"	23-1/8"	27"
railing height	39-3/8"	39-3/8"	39-3/8"
platform width	25-5/8"	29-1/2"	33-1/2"
rotation per tread	29,6°	25°	21,9°
rotation of the platform	54°	54°	54°
center column diameter	4-1/4"	4-1/4"	4-1/4"
thickness of treads	1-3/8"	1-3/8"	1-3/8"
baluster diameter	7/8"	7/8"	7/8"
handrail diameter	1-5/8"	1-5/8"	1-5/8"

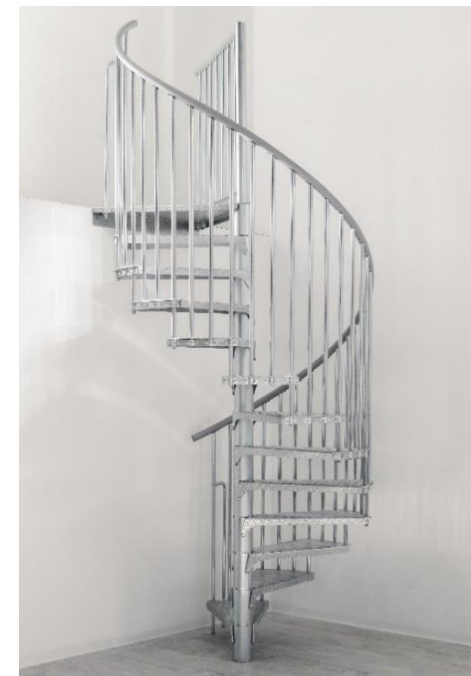

treads	hot-dipped galvanized steel
handrail	PVC handrail
center column	hot-dipped galvanized steel
balusters	hot-dipped galvanized steel
number of treads	12 + 1 platform